

Description

Halogen free, low smoke emission and UV resistant coaxial cable - 75 Ohm
Outdoor installation cable (Screening Class A+)



Data Sheet

DG163ZH



Ø	1,63 (Cu)	7,20 (PEG)	7,37 (Al/Pet/Al/Sur)	7,85 (CuSn)	10,10 (LSZH)
---	--------------	---------------	-------------------------	----------------	-----------------

Construction data

Inner conductor of plain copper	(Cu)	1,63 ± 0,03 mm
Dielectric of physical foam polyethylene	(PEG)	7,20 ± 0,10 mm
Aluminium/Polyester/Aluminium/Surlyne tape longitudinally overlapped and bonded to the dielectric	(Al/Pet/Al/Sur)	
Braid of tinned copper wires	(CuSn)	
Braid optical coverage (IEC 96-1)		78 %
Tracer Identifier	Year + Flag	
Diameter under Sheath		7,85 mm
Outer sheath of Thermoplastic material - grey (RAL 7001) - halogen-free, flame retardant and UV-resistant	(LSZH)	10,10 ± 0,15 mm

Printed each meter by blue ink-jet :

CAVEL DG 163 ZH MADE IN ITALY 75 Ohm EN50117-2-3 CEI-UNEL 36762 C-4 (U0 =400V) * LTE PROTECTION
* ss/aa m

(ss=week, aa=year) (m=meter marking)

Electrical data

Characteristic impedance	200 MHz	75 ± 2	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Factor		85 %	
Inner conductor resistance		8,50	Ohm/km
Outer conductor resistance		7,50	Ohm/km
Loop resistance		16	Ohm/km
Insulation voltage of the sheath (spark test)		5	kV
Maximum current (Ieff)		16	A

Structural return loss (SRL)

5 - 470 MHz	>30 dB
470 - 1000 MHz	>28 dB
1000 - 2000 MHz	>23 dB
2000 - 3000 MHz	>20 dB

Screening Attenuation (SA)

30 - 1000 MHz	>95 dB
1000 - 2000 MHz	>90 dB
2000 - 3000 MHz	>80 dB

Transfer impedance

5 - 30 MHz < 0,25 mOhm/m

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

10/05/2013

Responsible

PierPaolo Piccinini

Description

Halogen free, low smoke emission and UV resistant coaxial cable -
75 Ohm
Outdoor installation cable (Screening Class A+)



Data Sheet

DG163ZH

Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	1,10	862	12,30
10	1,50	1000	13,20
30	2,20	1750	17,90
50	2,80	2150	20,10
200	5,60	2400	21,60
300	6,90	3000	24,80
470	8,80		

Mechanical data

Weight of copper conductors	40,54	kg/km
Total weight of cable	106,42	kg/km
Minimum bending radius (single/repetead bending)	100	mm
Maximum cable pulling strength	300	N


Standards

EN 50117-2-3

Attenuazione di schermatura / Screening Attenuation

Cavo classe A+ / A+ Class Cable

Cavo tipo / Cable type: DG163ZH

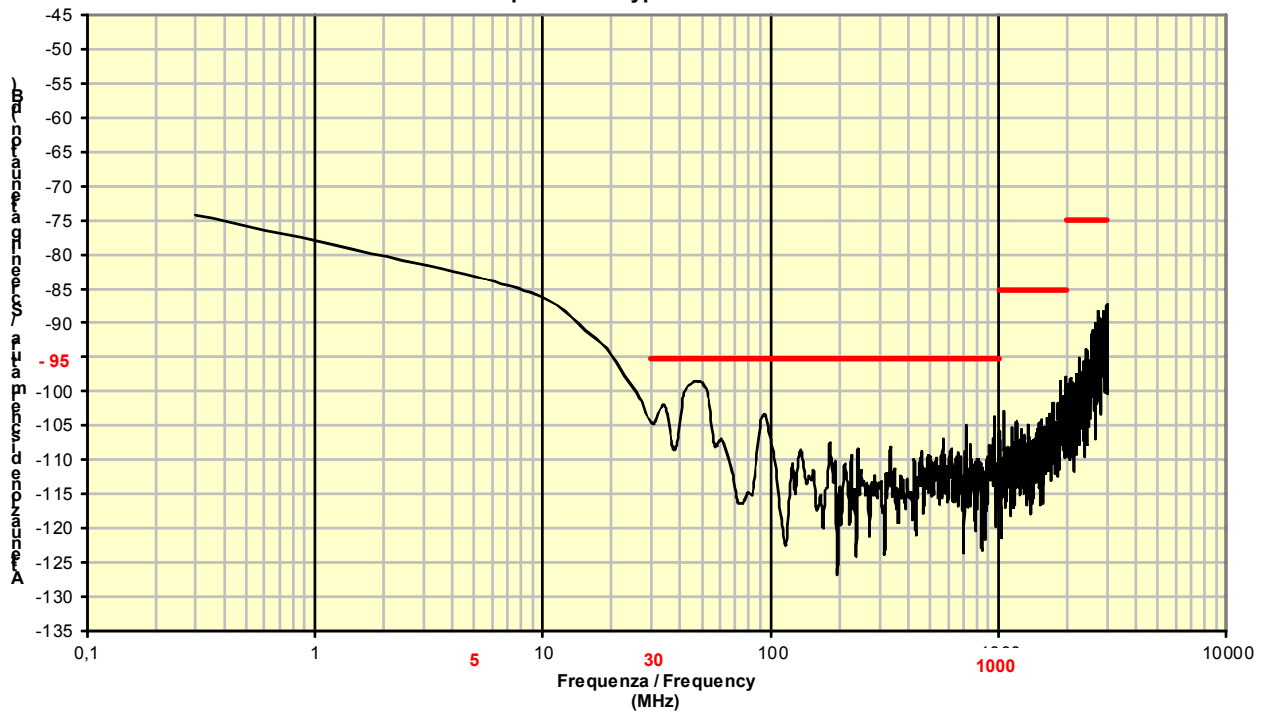

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

10/05/2013

Responsible

PierPaolo Piccinini

Description

Halogen free, low smoke emission and UV resistant coaxial cable -
75 Ohm
Outdoor installation cable (Screening Class A+)

**Data Sheet****DG163ZH****Connector**

FA17/73	Serie F Twist-On, F Twist-On, for indoor installation, nitin-plated brass - 33,0 mm x 14,5 mm
F163	Series F Crimp, F Crimp, for indoor installation, nitin-plated brass - 35,0 mm x 14,0 mm
FC11QM	Series F Compression, Quick Mount, for outdoor installation
FM-32	Series F, male, for outdoor and underground installation, nitin-plated brass - 76,0 mm x 31,0 mm
IEC14M-32	Series IEC (no tool), male, for outdoor and underground installation, nitin-plated brass - 64,5 mm x 21,0 mm
NM-32	Serie N, male, for outdoor and underground installation, nitin-plated brass - 62,5 mm x 21,0 mm
5/8MU-32	Serie 5/8", male, for outdoor and underground installation, nitin-plated brass - 69,0 mm x 20,5 mm
3,5/12M-32	Serie 3,5/12", male, for outdoor and underground installation, nitin-plated brass - 65,5 mm x 24,5 mm

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date**10/05/2013****Responsible****PierPaolo Piccinini**