

Description

Distribution and trunk coaxial cable for burial installation - 75 Ohm
Underground installation cable (Screening Class A)

Coaxial Cables

CAVEL®

since 1968

Data Sheet

17/73FC



Ø	1,63	7,20	7,30	7,78		10,10
	(Cu)	(PEG)	(Cu/Pet)	(Cu)	(Jelly2)	(PE)

Construction data

Inner conductor of plain copper	(Cu)	1,63 ± 0,03 mm
Dielectric of physical foam polyethylene	(PEG)	7,20 ± 0,10 mm
Water repellent sealing (dielectric)	(Jelly1)	
Copper/Polyester tape longitudinally overlapped	(Cu/Pet)	
Braid of annealed copper wires	(Cu)	
Braid optical coverage (IEC 96-1)		64 %
Tracer Identifier	Year + Flag	
Water repellent sealing (sheath)	(Jelly2)	
Diameter under Sheath		7,78 mm
Outer sheath of Polyethylene - black - with carbonblack	(PE)	10,10 ± 0,15 mm

Printed each meter by yellow ink-jet :

CAVEL 1.7/7.3 FC MADE IN ITALY 75 Ohm EN50117-2-3 CEI-UNEL 36762 C-4 (U0 =400V) ss/aa m

(ss=week, aa=year) (m=meter marking)

Electrical data

Characteristic impedance	200 MHz	75 ± 2	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Factor		85 %	
Inner conductor resistance		8,50	Ohm/km
Outer conductor resistance		9,50	Ohm/km
Loop resistance		18	Ohm/km
Insulation voltage of the sheath (spark test)		8	kV
Maximum current (I _{eff})		16	A

Structural return loss (SRL)

5 - 470 MHz	>30 dB
470 - 1000 MHz	>28 dB
1000 - 2000 MHz	>23 dB
2000 - 3000 MHz	>20 dB

Screening Attenuation (SA)

30 - 1000 MHz	>85 dB
1000 - 2000 MHz	>95 dB
2000 - 3000 MHz	>85 dB

Transfer impedance

5 - 30 MHz < 0,5 mOhm/m

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

18/04/2013

Responsible

PierPaolo Piccinini

Description

Distribution and trunk coaxial cable for burial installation - 75 Ohm
 Underground installation cable (Screening Class A)



Data Sheet

17/73FC

Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	1,10	862	11,50
10	1,50	1000	12,40
30	1,90	1750	17,10
50	2,50	2150	19,20
200	5,30	2400	20,40
300	6,50	3000	23,30
470	8,30		

Mechanical data

Weight of copper conductors	39,99	kg/km	
Total weight of cable	88,19	kg/km	
Minimum bending radius (single/repetead bending)	100	mm	
Maximum cable pulling strength	300	N	
Fire Load	2.119	MJ/km	589 kWh/km


Standards

EN 50117-2-3

Attenuazione di schermatura / Screening Attenuation

Cavo classe A / A Class Cable

Cavo tipo / Cable type: 17/73 FC

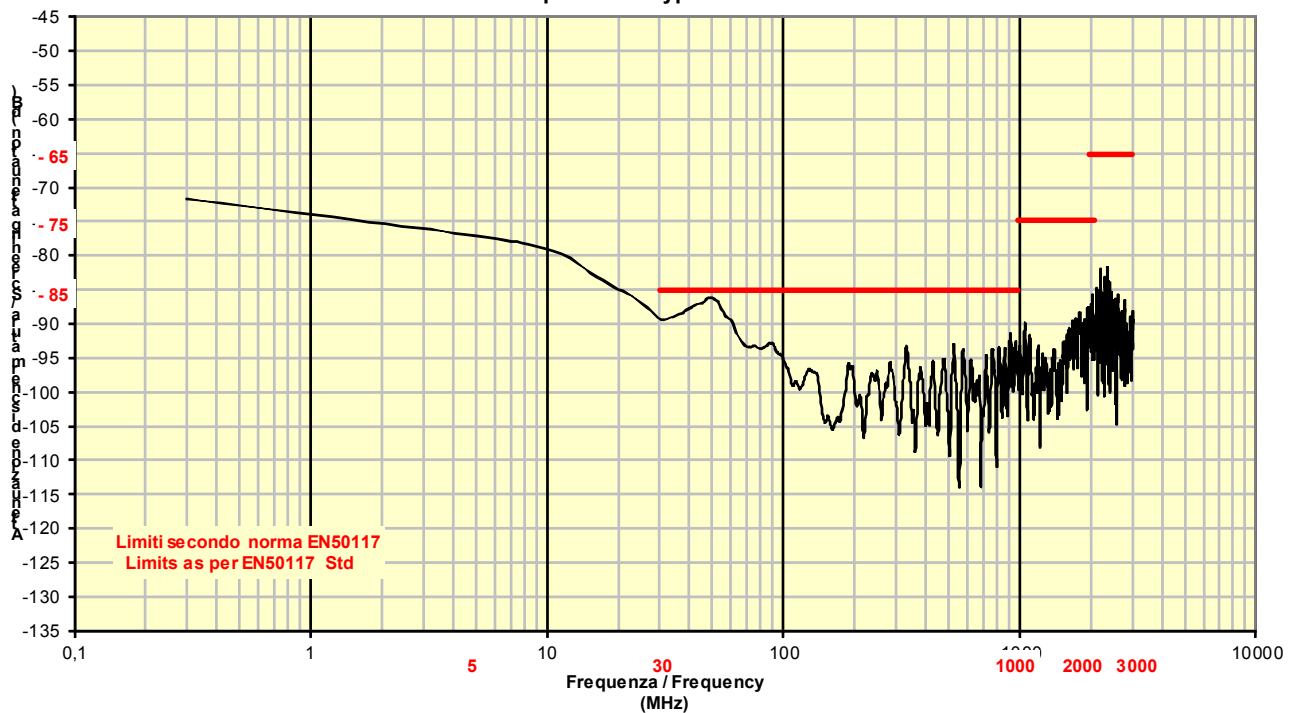

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

18/04/2013

Responsible

PierPaolo Piccinini

Description

Distribution and trunk coaxial cable for burial installation - 75 Ohm

Underground installation cable (Screening Class A)

**Data Sheet****17/73FC****Connector**

FA17/73	Serie F Twist-On, F Twist-On, for indoor installation, nitin-plated brass - 33,0 mm x 14,5 mm
F163	Series F Crimp, F Crimp, for indoor installation, nitin-plated brass - 35,0 mm x 14,0 mm
FC11QM	Series F Compression, Quick Mount, for outdoor installation
FM-32	Series F, male, for outdoor and underground installation, nitin-plated brass - 76,0 mm x 31,0 mm
IEC14M-32	Series IEC (no tool), male, for outdoor and underground installation, nitin-plated brass - 64,5 mm x 21,0 mm
NM-32	Serie N, male, for outdoor and underground installation, nitin-plated brass - 62,5 mm x 21,0 mm
5/8MU-32	Serie 5/8", male, for outdoor and underground installation, nitin-plated brass - 69,0 mm x 20,5 mm
3,5/12M-32	Serie 3,5/12", male, for outdoor and underground installation, nitin-plated brass - 65,5 mm x 24,5 mm

ITALIANA CONDUTTORI s.r.l.Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212**Date****18/04/2013****Responsible****PierPaolo Piccinini**