

Description

Indoor drop coaxial cable for digital reception - 75 Ohm

Cable for digital reception (Screening Class A+)

Coaxial Cables

CAVEL®

since 1968

Data Sheet

DG113



Ø	1,13	4,80	4,90	5,30	6,60
	(Cu)	(PEG)	(Al/Pet/Al)	(CuSn)	(PVC)

Construction data

Inner conductor of plain copper	(Cu)	1,13 ± 0,02 mm
Dielectric of physical foam polyethylene	(PEG)	4,80 ± 0,10 mm
Water repellent sealing (dielectric)	(Jelly1)	
Aluminium/Polyester/Aluminium tape longitudinally overlapped	(Al/Pet/Al)	
Braid of tinned copper wires	(CuSn)	
Braid optical coverage (IEC 96-1)		72 %
Diameter under Sheath		5,30 mm
Outer sheath of Polyvinylchloride - white (PVC) - lead-free	(PVC)	6,60 ± 0,10 mm

Printed each meter by blue ink-jet :

CAVEL DG 113 MADE IN ITALY 75 Ohm EN50117-2-4 CEI-UNEL 36762 C-4 (U0 =400V) * LTE PROTECTION *
 ss/aa m

(ss=week, aa=year) (m=meter marking)

Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Factor		85 %	
Inner conductor resistance		18	Ohm/km
Outer conductor resistance		13,90	Ohm/km
Loop resistance		31,90	Ohm/km
Insulation voltage of the sheath (spark test)		3	kV
Maximum current (I _{eff})		8	A

Structural return loss (SRL)

5 - 470 MHz	>30 dB
470 - 1000 MHz	>28 dB
1000 - 2000 MHz	>26 dB
2000 - 3000 MHz	>22 dB

Screening Attenuation (SA)

30 - 1000 MHz	>95 dB
1000 - 2000 MHz	>90 dB
2000 - 3000 MHz	>80 dB

Transfer impedance

5 - 30 MHz < 0,3 mOhm/m

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

27/02/2012

Responsible

PierPaolo Piccinini

Description

Indoor drop coaxial cable for digital reception - 75 Ohm

Cable for digital reception (Screening Class A+)



Data Sheet

DG113

Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	1,60	862	17,10
10	2,30	1000	18,50
30	3,20	1750	24,90
50	4,10	2150	27,90
200	8,00	2400	29,60
300	9,80	3000	33,40
470	12,40		

Mechanical data

Weight of copper conductors	19,20	kg/km	
Total weight of cable	43,38	kg/km	
Minimum bending radius (single/repetead bending)	35/70	mm	
Maximum cable pulling strength	150	N	
Fire Load	597	MJ/km	166 kWh/km


Standards

EN 50117-2-4

Attenuazione di schermatura / Screening Attenuation

Cavo classe A+ / A+ Class Cable

Cavo tipo / Cable type : DG 113

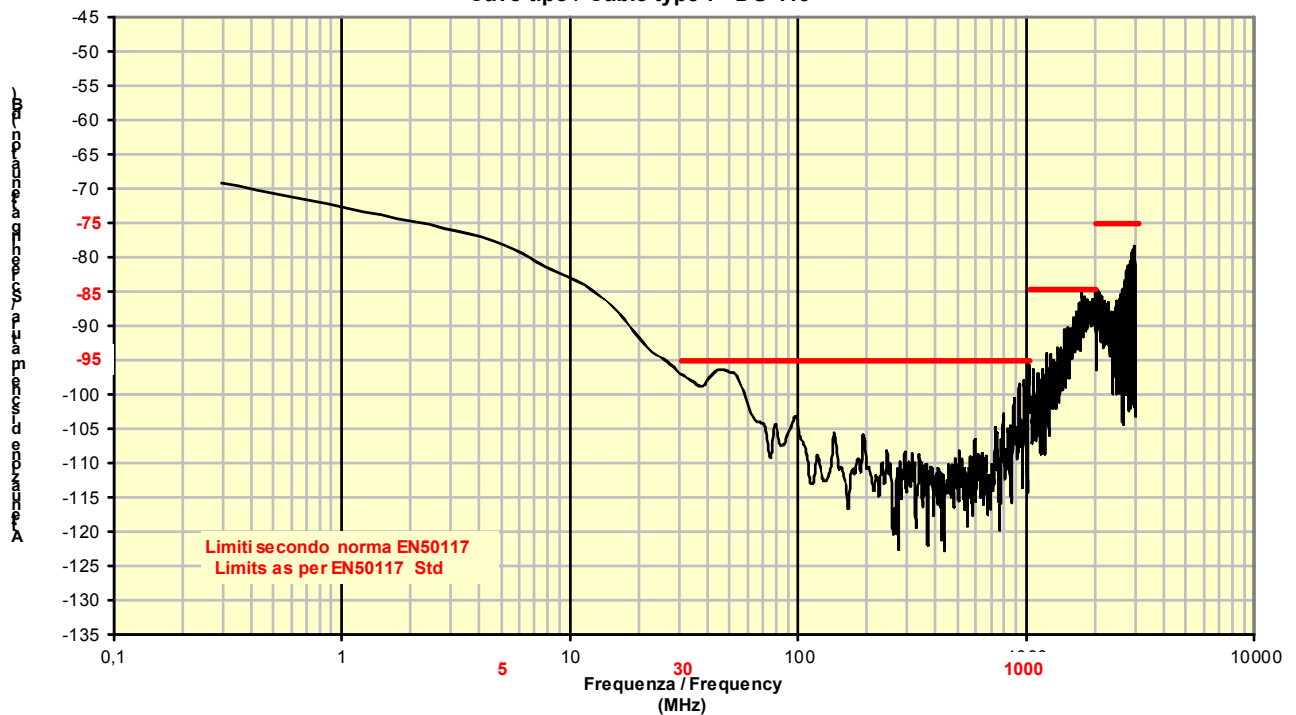

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

27/02/2012

Responsible

PierPaolo Piccinini

Description

Indoor drop coaxial cable for digital reception - 75 Ohm

Cable for digital reception (Screening Class A+)

**Data Sheet****DG113****Connector**

F90	Series F Crimp, F Crimp, for indoor installation
FA703	Serie F Twist-On, F Twist-On, for indoor installation, nitin-plated brass - 21,0 mm x 12,0 mm
F703	Series F Crimp, F Crimp, for indoor installation, nitin-plated brass - 21,0 mm x 12,0 mm
BNCC703	Series BNC Compression, BNC Compression, for outdoor installation, nitin-plated brass - 35,0 mm x 14,0 mm
IECF90C	Series IEC (no tool), Ø 5,1 90° female, for indoor installation
IECM90C	Series IEC (no tool), Ø 5,1 90° male, for indoor installation
FCPO5.1C	Series F Compression, Ø 5,1 Push-On, for outdoor installation, nitin-plated brass
FC703	Series F Compression, F Compression, for outdoor installation, nitin-plated brass - 30,0 mm x 12,0 mm
FC7.0QM	Series F Compression, Quick Mount, for outdoor installation
IECF703	Serie IEC Compression, female, no tool, for outdoor installation
IECM703	Serie IEC Compression, male, for outdoor installation
IECF5.1C	Series IEC (no tool), female, no tool, for indoor installation
IECM5.1C	Series IEC (no tool), male, no tool, for indoor installation
FR703	Series F Crimp, F crimp, "Rapid", for indoor installation

ITALIANA CONDUTTORI s.r.l.Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

27/02/2012

Responsible

PierPaolo Piccinini