


Description

Distribution and trunk coaxial cable with messenger rope - 75 Ohm
 Outdoor cable for hung-up installation (Screening Class A)



Data Sheet

CATV11AP

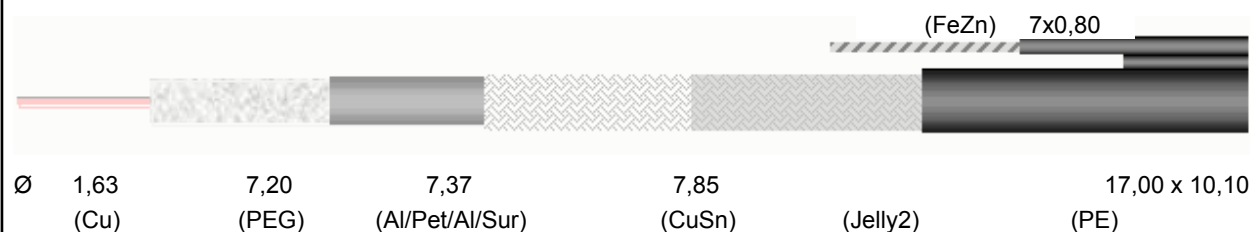

Construction data

Inner conductor of plain copper	(Cu)	1,63 ± 0,03 mm
Dielectric of physical foam polyethylene	(PEG)	7,20 ± 0,10 mm
Aluminium/Polyester/Aluminium/Surlyne tape longitudinally overlapped and bonded to the dielectric	(Al/Pet/Al/Sur)	
Braid of tinned copper wires	(CuSn)	
Braid optical coverage (IEC 96-1)		63 %
Tracer Identifier	Year + Flag	
Water repellent sealing (sheath)	(Jelly2)	
Diameter under Sheath		7,85 mm
Outer sheath of Polyethylene - black - with carbonblack	(PE)	17,00 x 10,10 ± 0,15 mm
Messenger rope of zinc-plated steel	(FeZn)	7x0,80 mm
Printed each meter by yellow ink-jet : CAVEL CATV 11 AP MADE IN ITALY 75 Ohm EN50117-2-3 ss/aa m (ss=week, aa=year) (m=meter marking)		
Messenger Maximum tensile strength		500,00 kg

Electrical data

Characteristic impedance	200 MHz	75 ± 2	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Factor		85 %	
Inner conductor resistance		8,50	Ohm/km
Outer conductor resistance		10	Ohm/km
Loop resistance		18,50	Ohm/km
Insulation voltage of the sheath (spark test)		8	kV
Maximum current (I _{eff})		16	A
Structural return loss (SRL)			
5 - 470 MHz	>30 dB		
470 - 1000 MHz	>28 dB		
1000 - 2000 MHz	>23 dB		
2000 - 3000 MHz	>20 dB		
Screening Attenuation (SA)			
30 - 1000 MHz	>85 dB	5 - 30 MHz	1,1 mOhm/m
1000 - 2000 MHz	>100 dB		
2000 - 3000 MHz	>90 dB		

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

18/04/2013

Responsible

PierPaolo Piccinini

Description

Distribution and trunk coaxial cable with messenger rope - 75 Ohm
 Outdoor cable for hung-up installation (Screening Class A)



Data Sheet

CATV11AP

Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	1,10	862	11,90
10	1,50	1000	12,80
30	2,20	1750	17,90
50	2,80	2150	19,80
200	5,60	2400	21,00
300	6,90	3000	24,00
470	8,80		

Mechanical data

Weight of copper conductors	34,57	kg/km	
Total weight of cable	123,76	kg/km	
Minimum bending radius (single/repeated bending)	100	mm	
Maximum cable pulling strength	300	N	
Fire Load	2.619	MJ/km	728 kWh/km


Standards

EN 50117-2-3

Attenuazione di schermatura / Screening Attenuation

Cavo classe A / A Class Cable

Cavo tipo / Cable type: CATV11AP

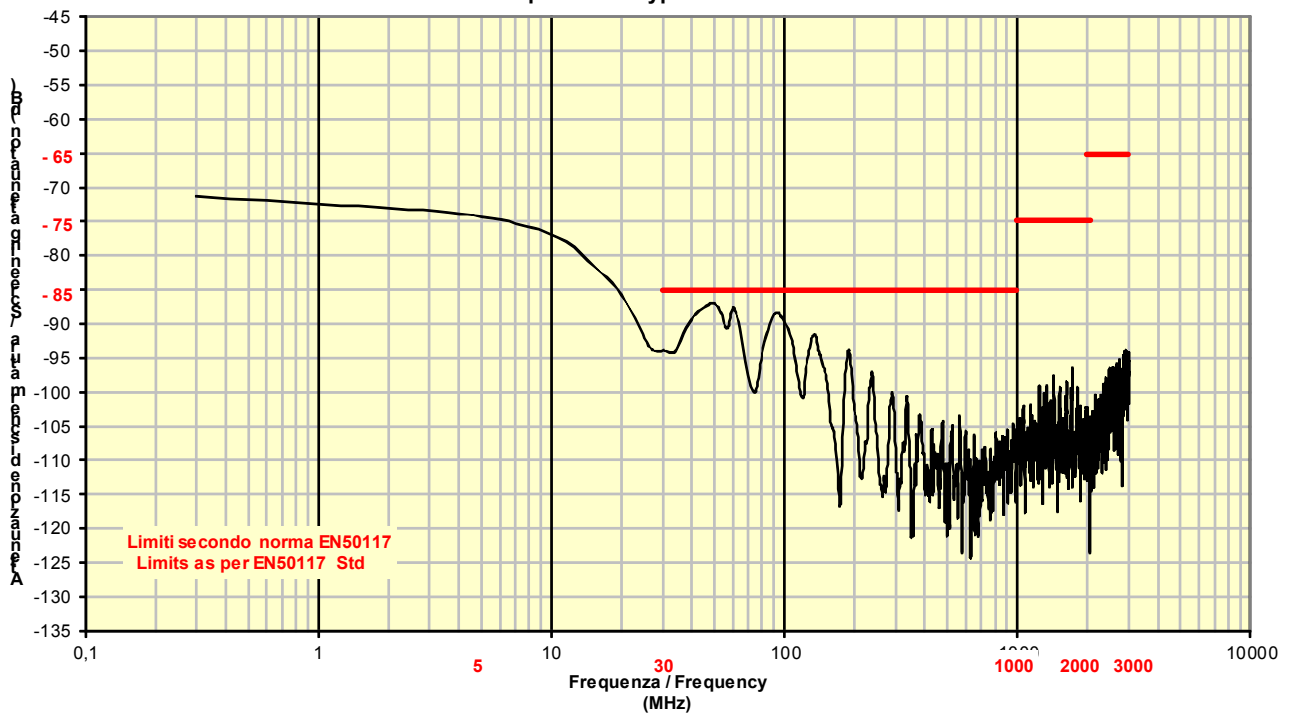

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

18/04/2013

Responsible

PierPaolo Piccinini

Description

Distribution and trunk coaxial cable with messenger rope - 75 Ohm

Outdoor cable for hung-up installation (Screening Class A)

**Data Sheet****CATV11AP****Connector**

FA17/73	Serie F Twist-On, F Twist-On, for indoor installation, nitin-plated brass - 33,0 mm x 14,5 mm
F163	Series F Crimp, F Crimp, for indoor installation, nitin-plated brass - 35,0 mm x 14,0 mm
FC11QM	Series F Compression, Quick Mount, for outdoor installation
FM-32	Series F, male, for outdoor and underground installation, nitin-plated brass - 76,0 mm x 31,0 mm
IEC14M-32	Series IEC (no tool), male, for outdoor and underground installation, nitin-plated brass - 64,5 mm x 21,0 mm
NM-32	Serie N, male, for outdoor and underground installation, nitin-plated brass - 62,5 mm x 21,0 mm
5/8MU-32	Serie 5/8", male, for outdoor and underground installation, nitin-plated brass - 69,0 mm x 20,5 mm
3,5/12M-32	Serie 3,5/12", male, for outdoor and underground installation, nitin-plated brass - 65,5 mm x 24,5 mm

ITALIANA CONDUTTORI s.r.l.Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212**Date****18/04/2013****Responsible****PierPaolo Piccinini**